


AZZURRO INTERIOR PRODUCTS

60 - Udyognagar,
City - Gondal - 360 311.
State - Gujarat
Country - India.
Contact - +91 98242 02010
Email - contact@azzurro.co.in
Web - www.azzurro.co.in



VALVE

TECHNOLOGY AT ITS BEST

Azzurro[®]
VALVE



- DOUBLE UNION BRASS BALL VALVE.
- FORGED BRASS BALL VALVE.
- IC STAINLESS STEEL BALL VALVE.
- BRASS SPRING CHECK VALVE.
- DOUBLE UNION BRASS SPRING CHECK VALVE.

HEAVY BRASS BALL VALVE

WELCOME TO WORLD OF **AZZURRO®** VALVES.

Azzurro® Brass ball valves are compact, heavy duty, simple & cost effective.

Azzurro® Brass ball valves are full flow, quarter turn, handle operated, general purpose ball valves to control or stop the flow of liquid or gas in any piping systems. These valves are manufactured from forgings of graded brass extruded rods and machined on highly accurate CNC machines to achieve International Standard Quality.

Azzurro® Brass ball valves are manufactured by Azzurro Interior Products. Gondal (District-Rajkot) INDIA.

These Valves are designed and developed according to International Standard.

The design construction of valve is competent to achieve 25 Bar flow Pressure of water.

100 % Valves are tested at 6 Bar air pressure according to Standard EN 12266-1.

AZZURRO® VALVES ARE QUALITY PRODUCTS

AZZURRO® VALVES ARE KNOWN FOR TECHNOLOGY, ACCURACY, QUALITY, DESIGN

INSTALLATION

» **Azzurro®** Brass ball valves can be installed Bi-Directional.

VALVE
TECHNOLOGY AT ITS BEST


Azzurro®
VALVE

SPECIFICATIONS

- » Material – Full brass forged body. (Nickel plated).
- » Seat ring – Virgin PTFE (Teflon).
- » Lever(handle) – Stainless Steel Handle.
- » Lever(handle) Nut – Stainless Steel Nylon Nut.
- » Ball – Brass Ball Super Finish Chrome Plated.
- » End threads – BSP to ISO 228 at Both Ends.
- » Temperature Working – (-20° to 180° degree C).
- » Pressure rating – 25 Bar (at 60° degree C).

BENEFITS


- » Azzurro® Valves Come With Rust Proof Stainless Steel Handle.
- » Azzurro® Valve Use Stainless Steel Nylon Insert Nut.
- » Azzurro® Valves Are Highly Corrosion (Rust) Resistance With Hard Water Contact.
- » Azzurro® Valves Are Designed Such That No Leakage At Low Or High Pressure.
- » Azzurro® Valves Are Manufactured From Low Lead Content Brass.
- » Azzurro® Valves Are Easy To Fit And Replace With Standard Pipe Threads.

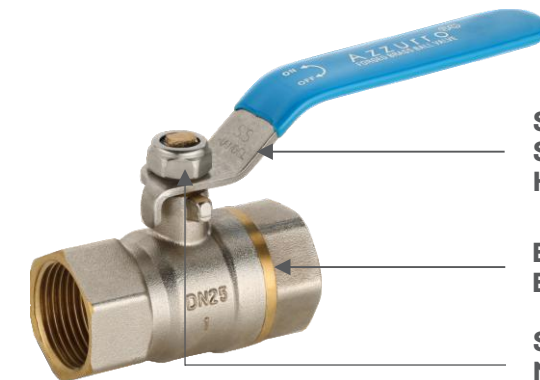

**STAINLESS
STEEL
HANDLE**

**BRASS
BODY**

**STAINLESS STEEL
NYLON INSERT
LOCK NUT**




**STAINLESS STEEL
NYLON INSERT
LOCK NUT**

HEAVY BRASS
BALL VALVE

MATERIAL SPECIFICATION			
NO	QTY	DESCRIPTION	MATERIAL
1	1	LOCK NUT	STAINLESS STEEL NYLON LOCK NUT
2	1	HANDLE (LEVER)	STAINLESS STEEL
3	2	O RING	RUBBER
4	1	SPINDLE	BRASS STUD
5	1	BODY	BRASS (NICKEL PLATED)
6	2	SEAT RING	VIRGIN PTFE (TEFLON)
7	1	BALL	BRASS (POLISHED NiCr PLATED)
8	1	NUT	BRASS (NICKEL PLATED)
9	1	THREAD	BSP THREAD
10	1	HANDLE (LEVER) SLEEVE	PVC




STAINLESS STEEL
NYLON INSERT
LOCK NUT

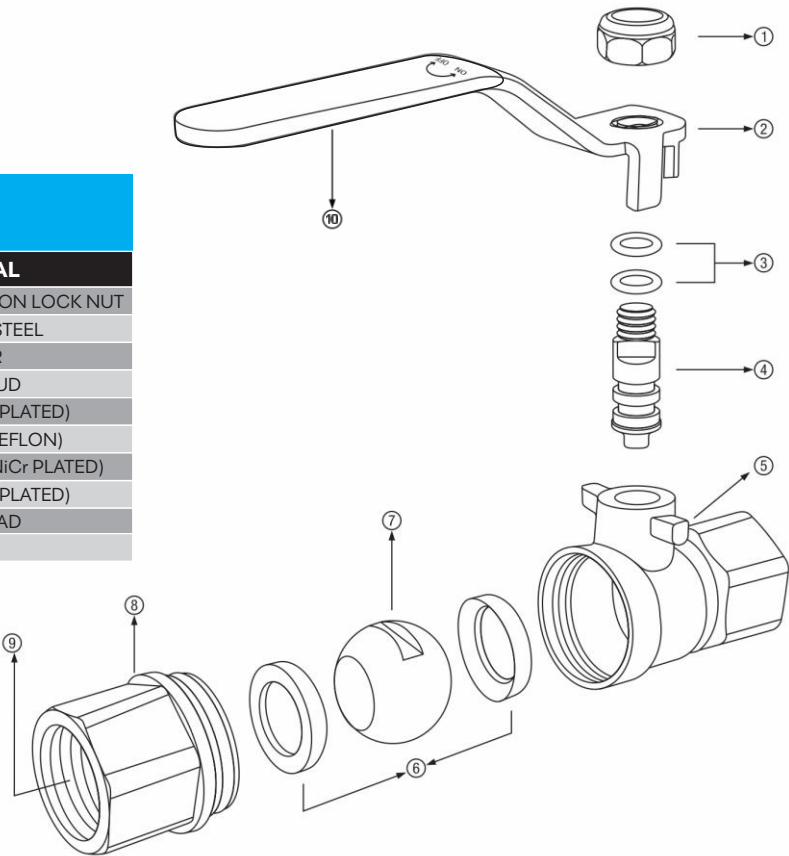

CONTENT

HEAVY BRASS BALL VALVE.....	06
C-PVC DOUBLE UNION BRASS BALL VALVE.....	07
U-PVC DOUBLE UNION BRASS BALL VALVE.....	08
PP-R DOUBLE UNION BRASS BALL VALVE.....	09
BUTTERFLY HANDLE BRASS BALL VALVE.....	10
NOZZLE BRASS BIB COCK.....	11
MEDIUM BRASS BALL VALVE.....	12
IC STAINLESS STEEL BALL VALVE.....	14

HEAVY BRASS BALL VALVE

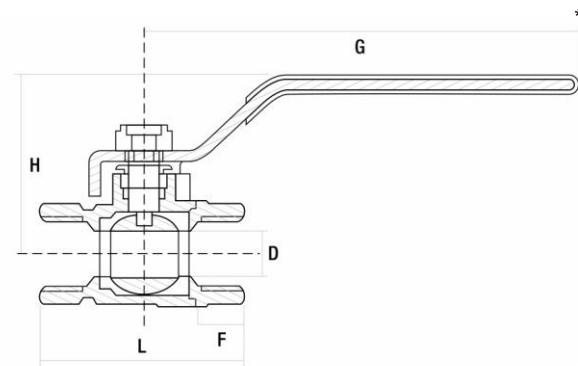

HEAVY BRASS BALL VALVE WITH SS HANDLE,
NY LOCK NUT (SS)


CODE	DN	SIZE	D	L	H	G	F	PCS /CTN	M.R.P.: ₹
BLV1901	15	½"	14	63	43	98	17	144	395
BLV1902	20	¾"	19	68	51	102	19	120	580
BLV1903	25	1"	23	77	63	134	22	60	840
BLV1904	32	1 ¼"	31	87	70	155	20	30	1440
BLV1905	40	1 ½"	36	97	73	160	22	30	2125
BLV1906	50	2"	46	113	77	160	24	16	3290
BLV1907	65	2 ½"	58	135	110	235	30	2	7040
BLV1908	80	3"						1	8620
BLV1909	100	4"							
BLV1910	8	¼"						144	245
BLV1959	10	3/8"						144	265



STAINLESS STEEL
NYLON INSERT
LOCK NUT

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

C-PVC DOUBLE UNION BRASS BALL VALVE

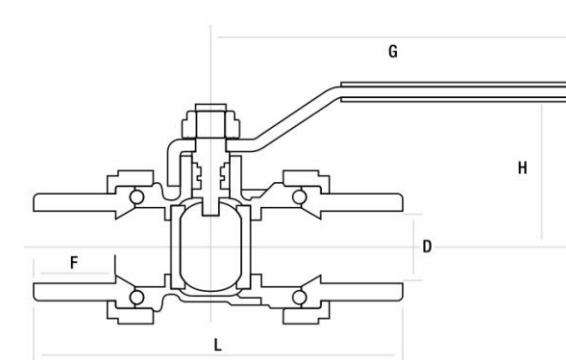

C-PVC DOUBLE UNION BRASS BALL VALVE WITH
SS HANDLE, NY LOCK NUT (SS)

CODE	DN	SIZE	D	L	H	G	F	PCS /CTN	M.R.P.: ₹
BLV1911	20	3/4"	22	86	43	98	18	66	670
BLV1912	25	1"	28.7	100	55	98	23	60	850
BLV1913	32	1 ¼"	35.5	115	58	125	27	15	2005
BLV1914	40	1 ½"	41.5	130	70	155	30	15	2395
BLV1915	50	2"						10	4545




STAINLESS STEEL
NYLON INSERT
LOCK NUT

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

U-PVC DOUBLE UNION BRASS BALL VALVE

Azzurro[®]
VALVE

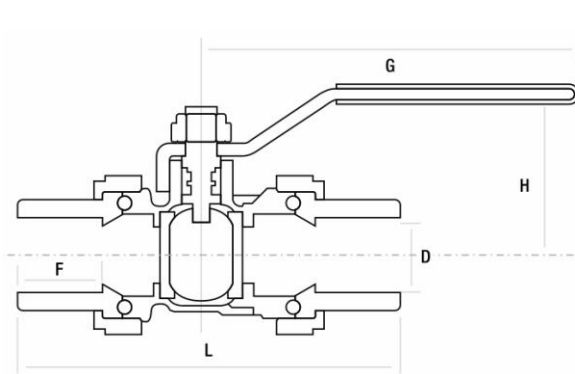

STAINLESS STEEL
NYLON INSERT
LOCK NUT



U-PVC DOUBLE UNION BRASS BALL VALVE WITH SS HANDLE, NY LOCK NUT (SS)

CODE	DN	SIZE	D	L	H	G	F	PCS /CTN	M.R.P.: ₹
BLV1921	15	½"	21.5	89	43	98	19.8	66	610
BLV1922	20	¾"	27	99	55	98	20.8	60	795
BLV1923	25	1"	33.5	116	58	125	26.5	30	1295
BLV1924	32	1 ¼"	42.5	128	70	155	30	15	1935
BLV1925	40	1 ½"	48.6	146	73	160	36	15	2310
BLV1926	50	2"						10	4445

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

PP-R DOUBLE UNION BRASS BALL VALVE

Azzurro[®]
VALVE

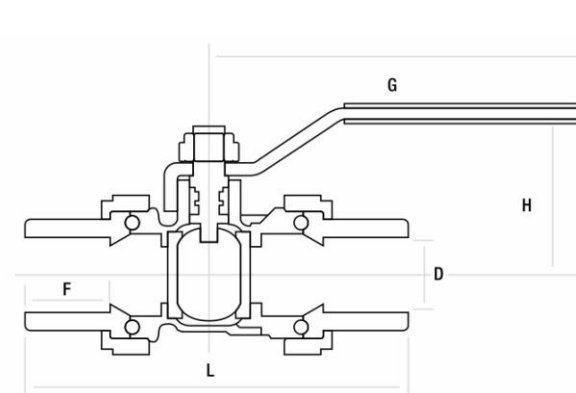


STAINLESS STEEL
NYLON INSERT
LOCK NUT

PP-R DOUBLE UNION BRASS BALL VALVE WITH SS HANDLE, NY LOCK NUT (SS)

CODE	SIZE	D	L	H	G	F	PCS /CTN	M.R.P.: ₹
BLV1931	20MM	19.2	88	30	98	18	66	675
BLV1932	25MM	24	97	55	98	19.5	60	905
BLV1933	32MM	30.6	114	58	125	23	30	1340

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

BUTTERFLY HANDLE BRASS BALL VALVE

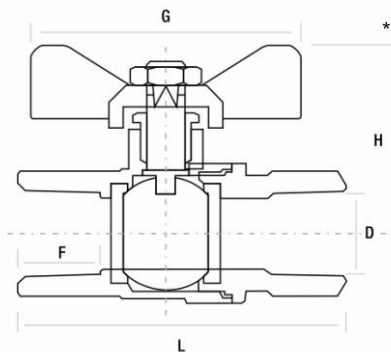

BUTTERFLY HANDLE HEAVY BRASS BALL VALVE


CODE	DN	SIZE	D	L	H	G	F	PCS/CTN	M.R.P.: ₹
BLV1941	15	½"	14	63	42	51	17	144	385
BLV1942	20	¾"	19	68	46	51	19	120	575
BLV1943	25	1"							
BLV1944	8	¼"						144	245
BLV1945	10	3/8"						144	265

**BUTTERFLY HANDLE MEDIUM
BRASS BALL VALVE**

CODE	DN	SIZE	PCS/CTN	M.R.P.: ₹
BLV1946	15	½"	144	315
BLV1947	20	¾"	120	475
BLV1948	25	1"	60	705
BLV1949	8	¼"		
BLV1950	10	3/8"		

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

NOZZLE BRASS BIB COCK

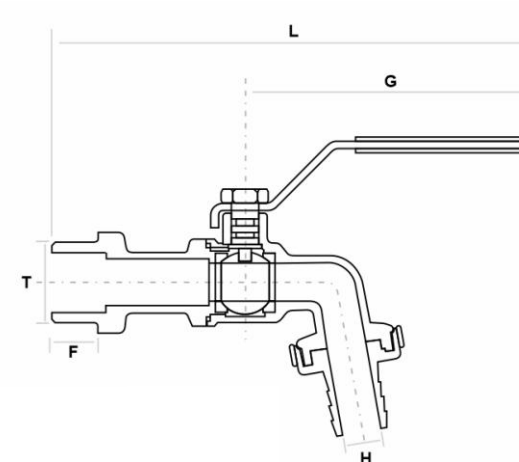


NOZZLE BRASS BIB COCK WITH STAINLESS STEEL HANDLE

CODE	DN	SIZE	L	H	G	F	T	PCS /CTN	M.R.P.: ₹
BLV1951	15	½"	145	15	97	12	½"	120	395
BLV1952	15	½"	145	20	97	15	¾"	120	415
BLV1953	20	¾"	145	15	97	12	½"	120	420
BLV1954	20	¾"	145	20	97	15	¾"	120	435

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

MEDIUM BRASS BALL VALVE

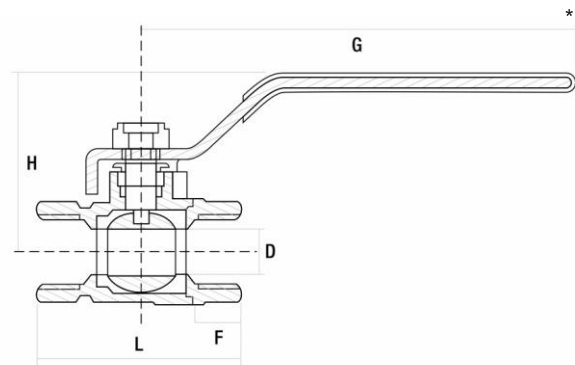

**MEDIUM BRASS BALL VALVE WITH MS
CHROME PLATED HANDLE**

CODE	DN	SIZE	PCS /CTN	M.R.P.: ₹
BLV1971	15	½"	144	325
BLV1972	20	¾"	120	483
BLV1973	25	1"	60	715
BLV1974	32	1 ¼"	30	1220
BLV1975	40	1 ½"	30	1615
BLV1976	50	2"	16	2305

Azzurro[®]
VALVE


*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.

Azzurro[®]
VALVE




**IC STAINLESS
STEEL
BALL VALVE**

IC STAINLESS STEEL BALL VALVE

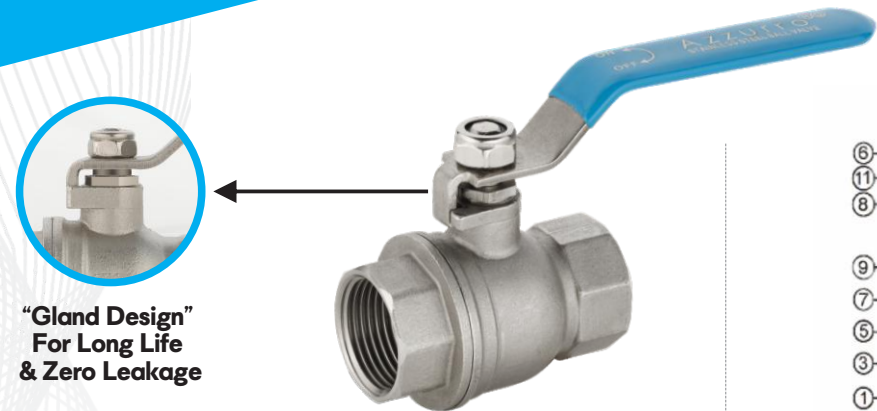

“Gland Design”
For Long Life
& Zero Leakage

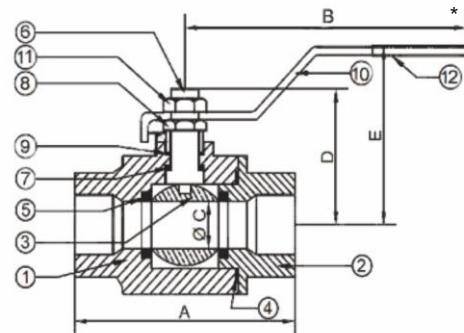

MATERIAL SPECIFICATON

PART NO	PART TIME	QTY	MAT. OF CONSTRUCTION
1	BODY (B)	1	SS 304/316
2	BODY NUT	1	SS 304/316
3	BALL (B)	1	SS 202/304/316
4	BODY GASKET	1	PTFE
5	BALL SEAT	1	PTFE
6	STEM (S)	1	SS 202/304/316
7	STEM SEAT	1	PTFE
8	GLAND NUT (G)	1	SS 202/304
9	GLAND PACKING	1	PTFE
10	HANDEL (LEVER) (H)	1	SS 202/304
11	HANDLE (LEVER NUT) (N)	1	SS 202/304
12	SLEEVE	1	PVC

FEATURES

DESIGN STD	AS PER BS 5351/IS 9890-1981
END CONNECTOR	SCREWED END BSP/NPT
TESTING STD	AS PER BS 5146, ISO 5208/API598
SIZE	15MM TO 80MM

Azzurro[®]
VALVE

Azzurro[®]
VALVE

NO - 01

STAINLESS STEEL BALL VALVE (B3B2S2G2H2N2)

CODE	DN	SIZE	A	B	CØ	D	E	PCS/CTN.	M.R.P.: ₹
BLV2001	15	½"	57	100	14	43	52	144	555
BLV2002	20	¾"	67	100	19	46	55	120	710
BLV2003	25	1"	76	120	25	58	72	60	1020
BLV2004	32	1 ¼"	85	120	32	65	78	48	1500
BLV2005	40	1 ½"	97	155	38	74	92	48	2050
BLV2006	50	2"	113	155	50	88	106	21	2895
BLV2007	65	2 ½"	139	235	65	110	125	16	5995
BLV2008	80	3"	155	235	75	125	140	16	7700
BLV2009	100	4"							
BLV2010	8	¼"	50	87	9	36	45	144	555
BLV2011	10	3/8"	50	87	10	36	45	144	555

NO - 03

STAINLESS STEEL BALL VALVE (B6B3S3G3H2N2)

CODE	DN	SIZE	A	B	CØ	D	E	PCS/CTN.	M.R.P.: ₹
BLV2041	15	½"	57	100	14	43	52	144	675
BLV2042	20	¾"	67	100	19	46	55	120	870
BLV2043	25	1"	76	120	25	58	72	60	1285
BLV2044	32	1 ¼"	85	120	32	65	78	48	1970
BLV2045	40	1 ½"	97	155	38	74	92	48	2690
BLV2046	50	2"	113	155	50	88	106	21	3995
BLV2047	65	2 ½"	139	235	65	110	125	16	7825
BLV2048	80	3"	155	235	75	125	140	16	10150
BLV2049	100	4"							
BLV2050	8	¼"	50	87	9	36	45	144	675
BLV2051	10	3/8"	50	87	10	36	45	144	675

NO - 02

STAINLESS STEEL BALL VALVE (B3B3S3G3H2N2)

CODE	DN	SIZE	A	B	CØ	D	E	PCS/CTN.	M.R.P.: ₹
BLV2021	15	½"	57	100	14	43	52	144	610
BLV2022	20	¾"	67	100	19	46	55	120	790
BLV2023	25	1"	76	120	25	58	72	60	1160
BLV2024	32	1 ¼"	85	120	32	65	78	48	1780
BLV2025	40	1 ½"	97	155	38	74	92	48	2425
BLV2026	50	2"	113	155	50	88	106	21	3550
BLV2027	65	2 ½"	139	235	65	110	125	16	7000
BLV2028	80	3"	155	235	75	125	140	16	9100
BLV2029	100	4"							
BLV2030	8	¼"	50	87	9	36	45	144	610
BLV2031	10	3/8"	50	87	10	36	45	144	610

NO - 04

STAINLESS STEEL BALL VALVE (B6B6S6G3H2N2)

CODE	DN	SIZE	A	B	CØ	D	E	PCS/CTN.	M.R.P.: ₹
BLV2061	15	½"	57	100	14	43	52	144	740
BLV2062	20	¾"	67	100	19	46	55	120	950
BLV2063	25	1"	76	120	25	58	72	60	1440
BLV2064	32	1 ¼"	85	120	32	65	78	48	2095
BLV2065	40	1 ½"	97	155	38	74	92	48	2850
BLV2066	50	2"	113	155	50	88	106	21	4385
BLV2067	65	2 ½"	139	235	65	110	125	16	8395
BLV2068	80	3"	155	235	75	125	140	16	10850
BLV2069	100	4"							
BLV2070	8	¼"	50	87	9	36	45	144	740
BLV2071	10	3/8"	50	87	10	36	45	144	740

*The dimensions shown are the approximate. Actual size of the valve vary due to some factors.